

FIGURE 1A

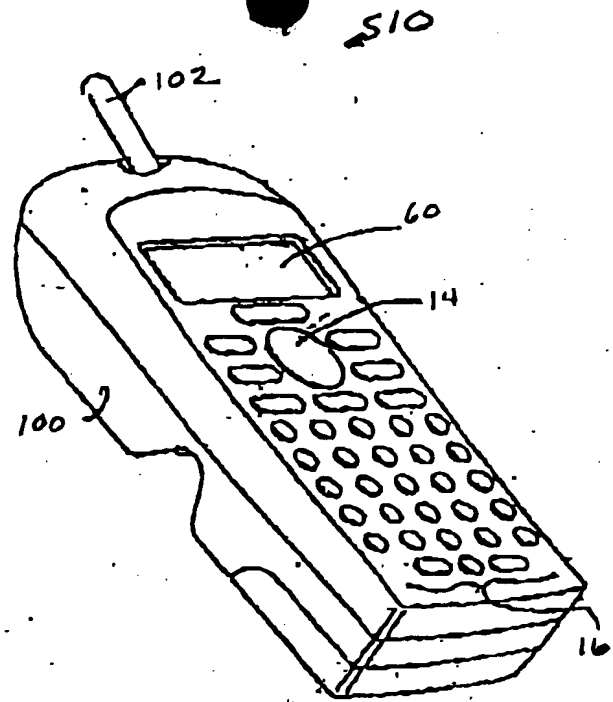
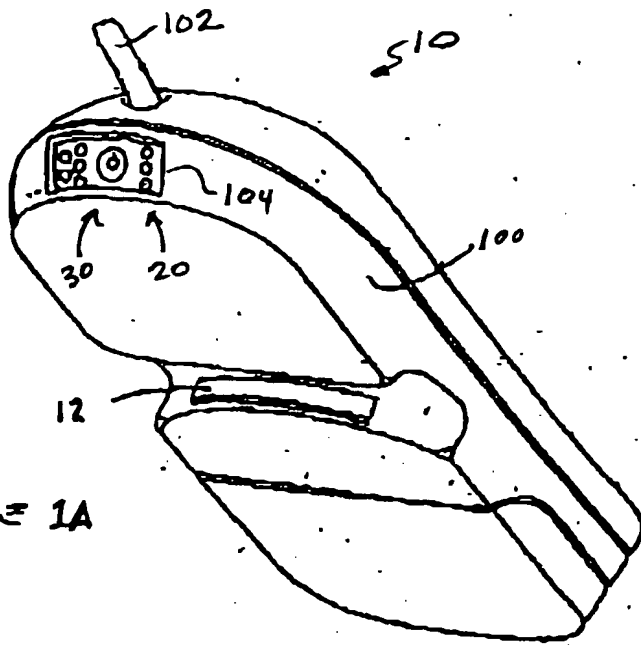


FIGURE 1B

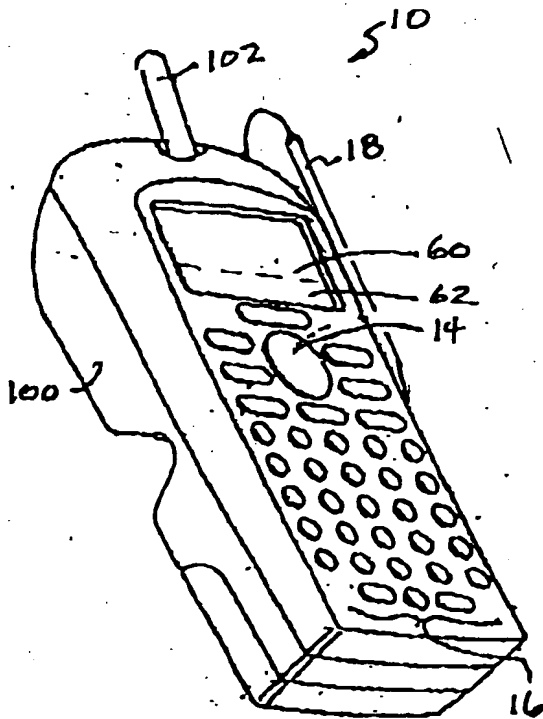


FIGURE 1C

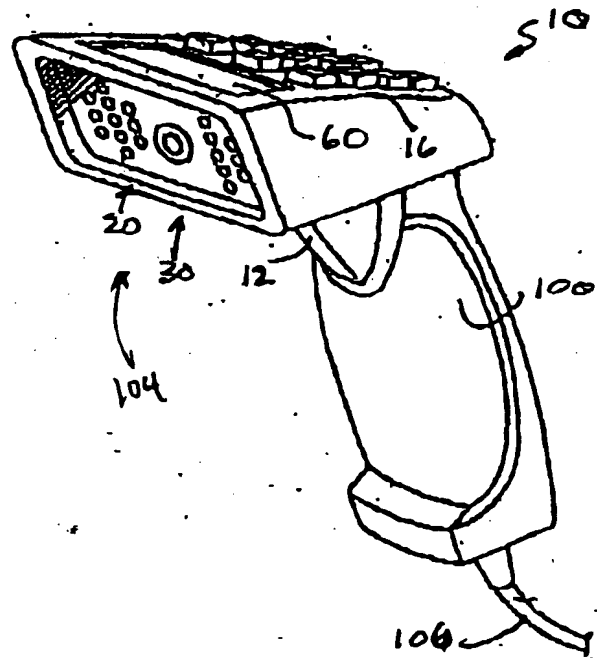


FIGURE 1D

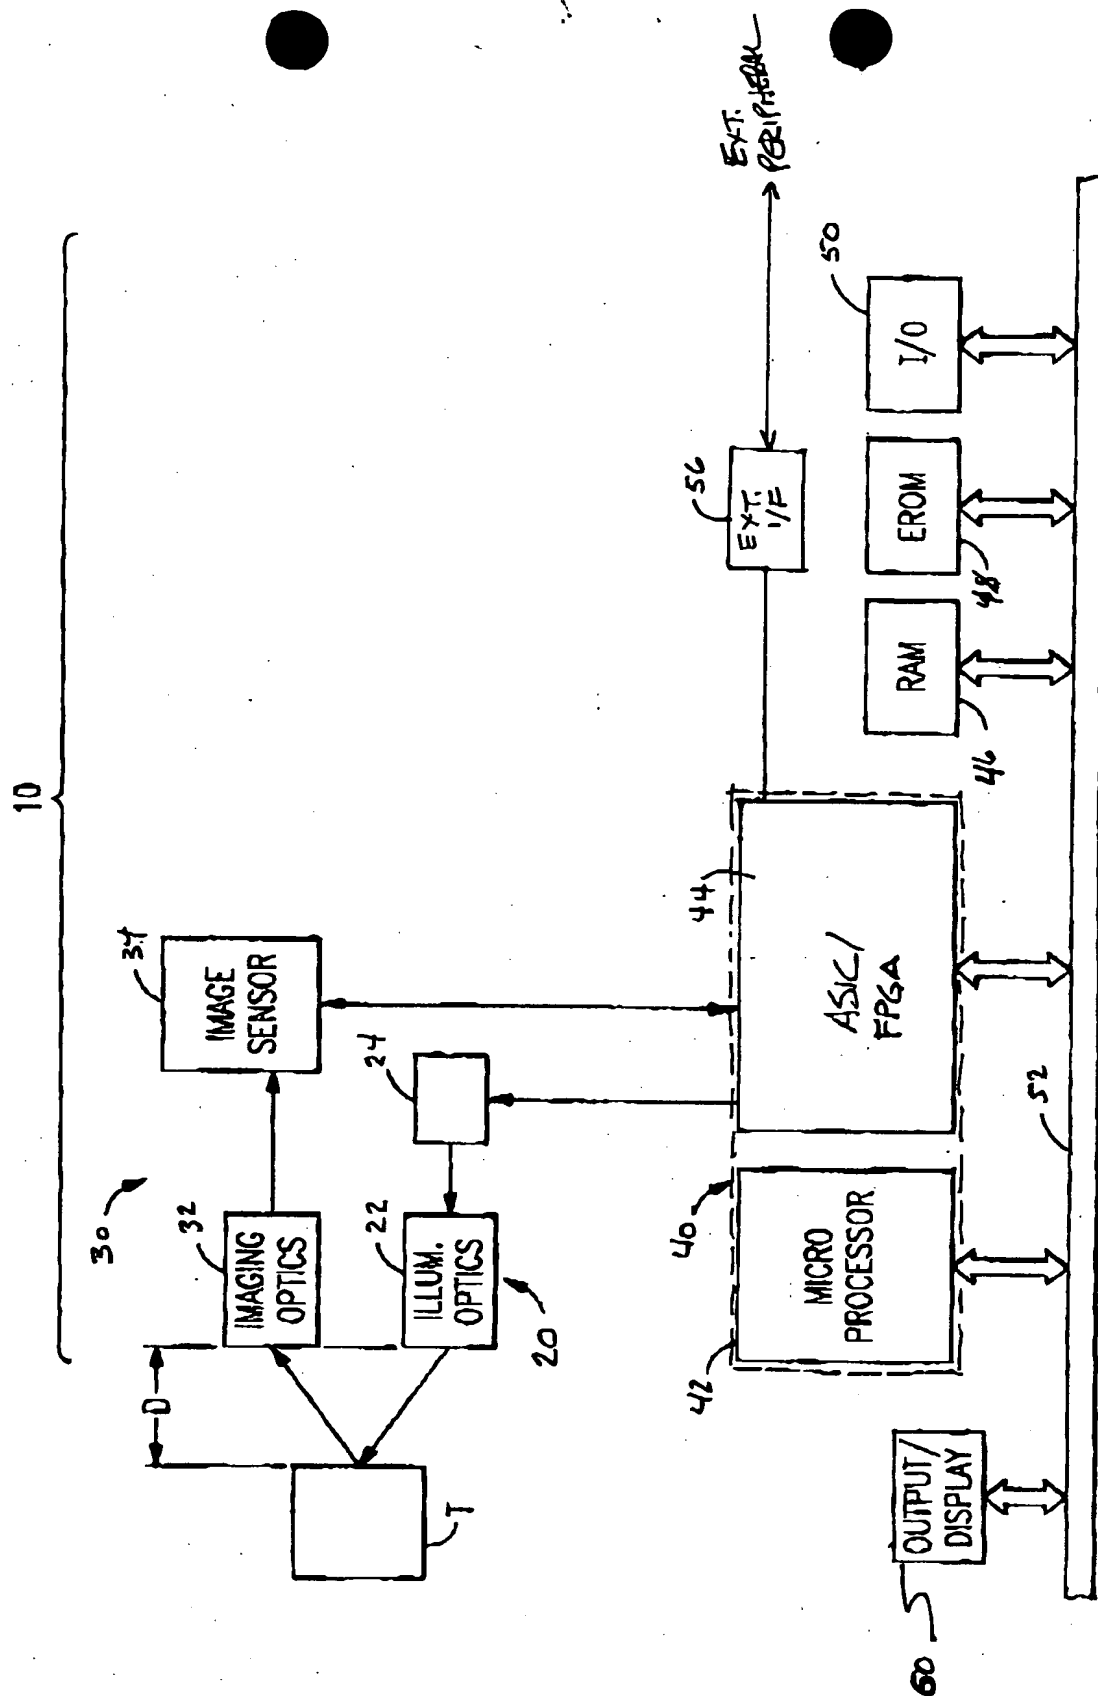


FIG. 2

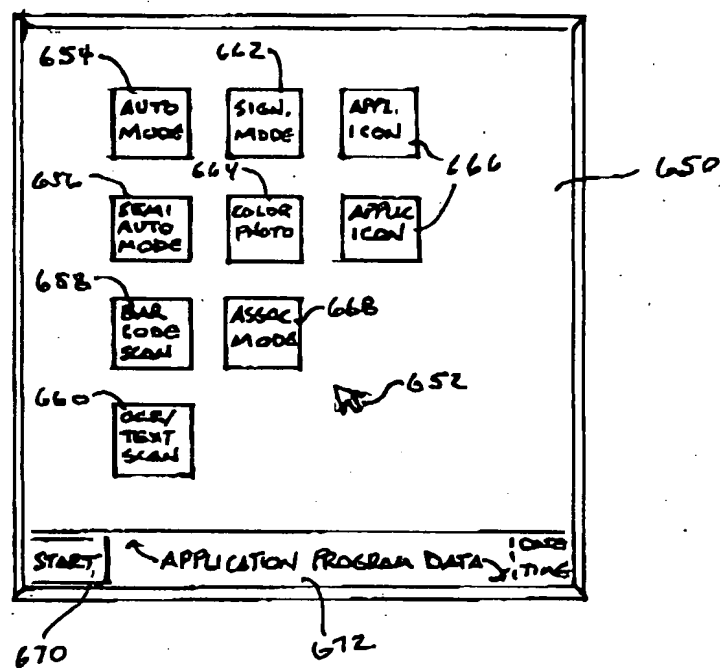
[illegible]

FIGURE 3

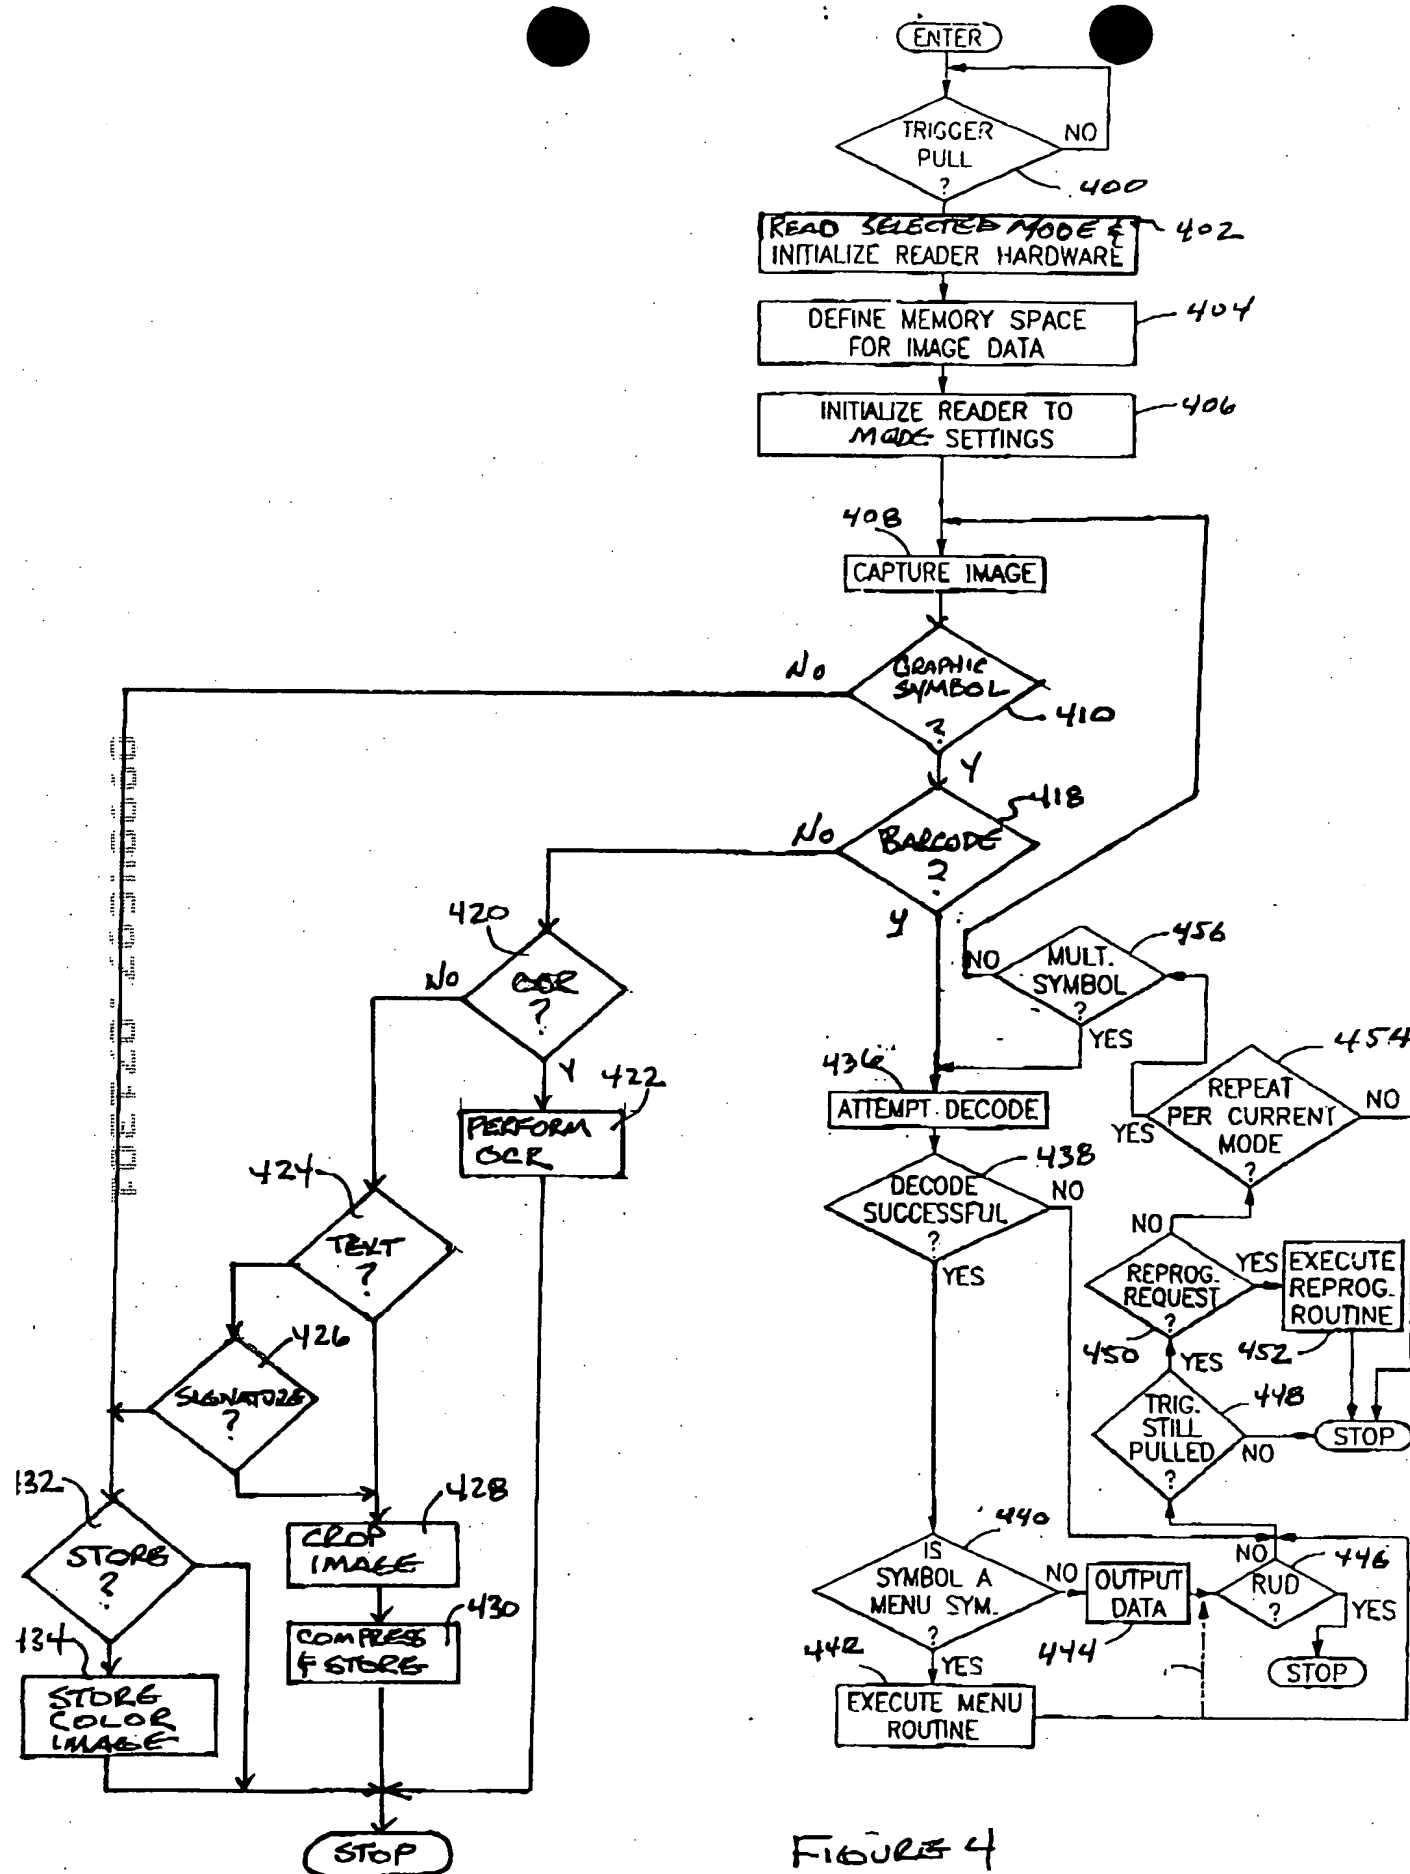


FIGURE 4

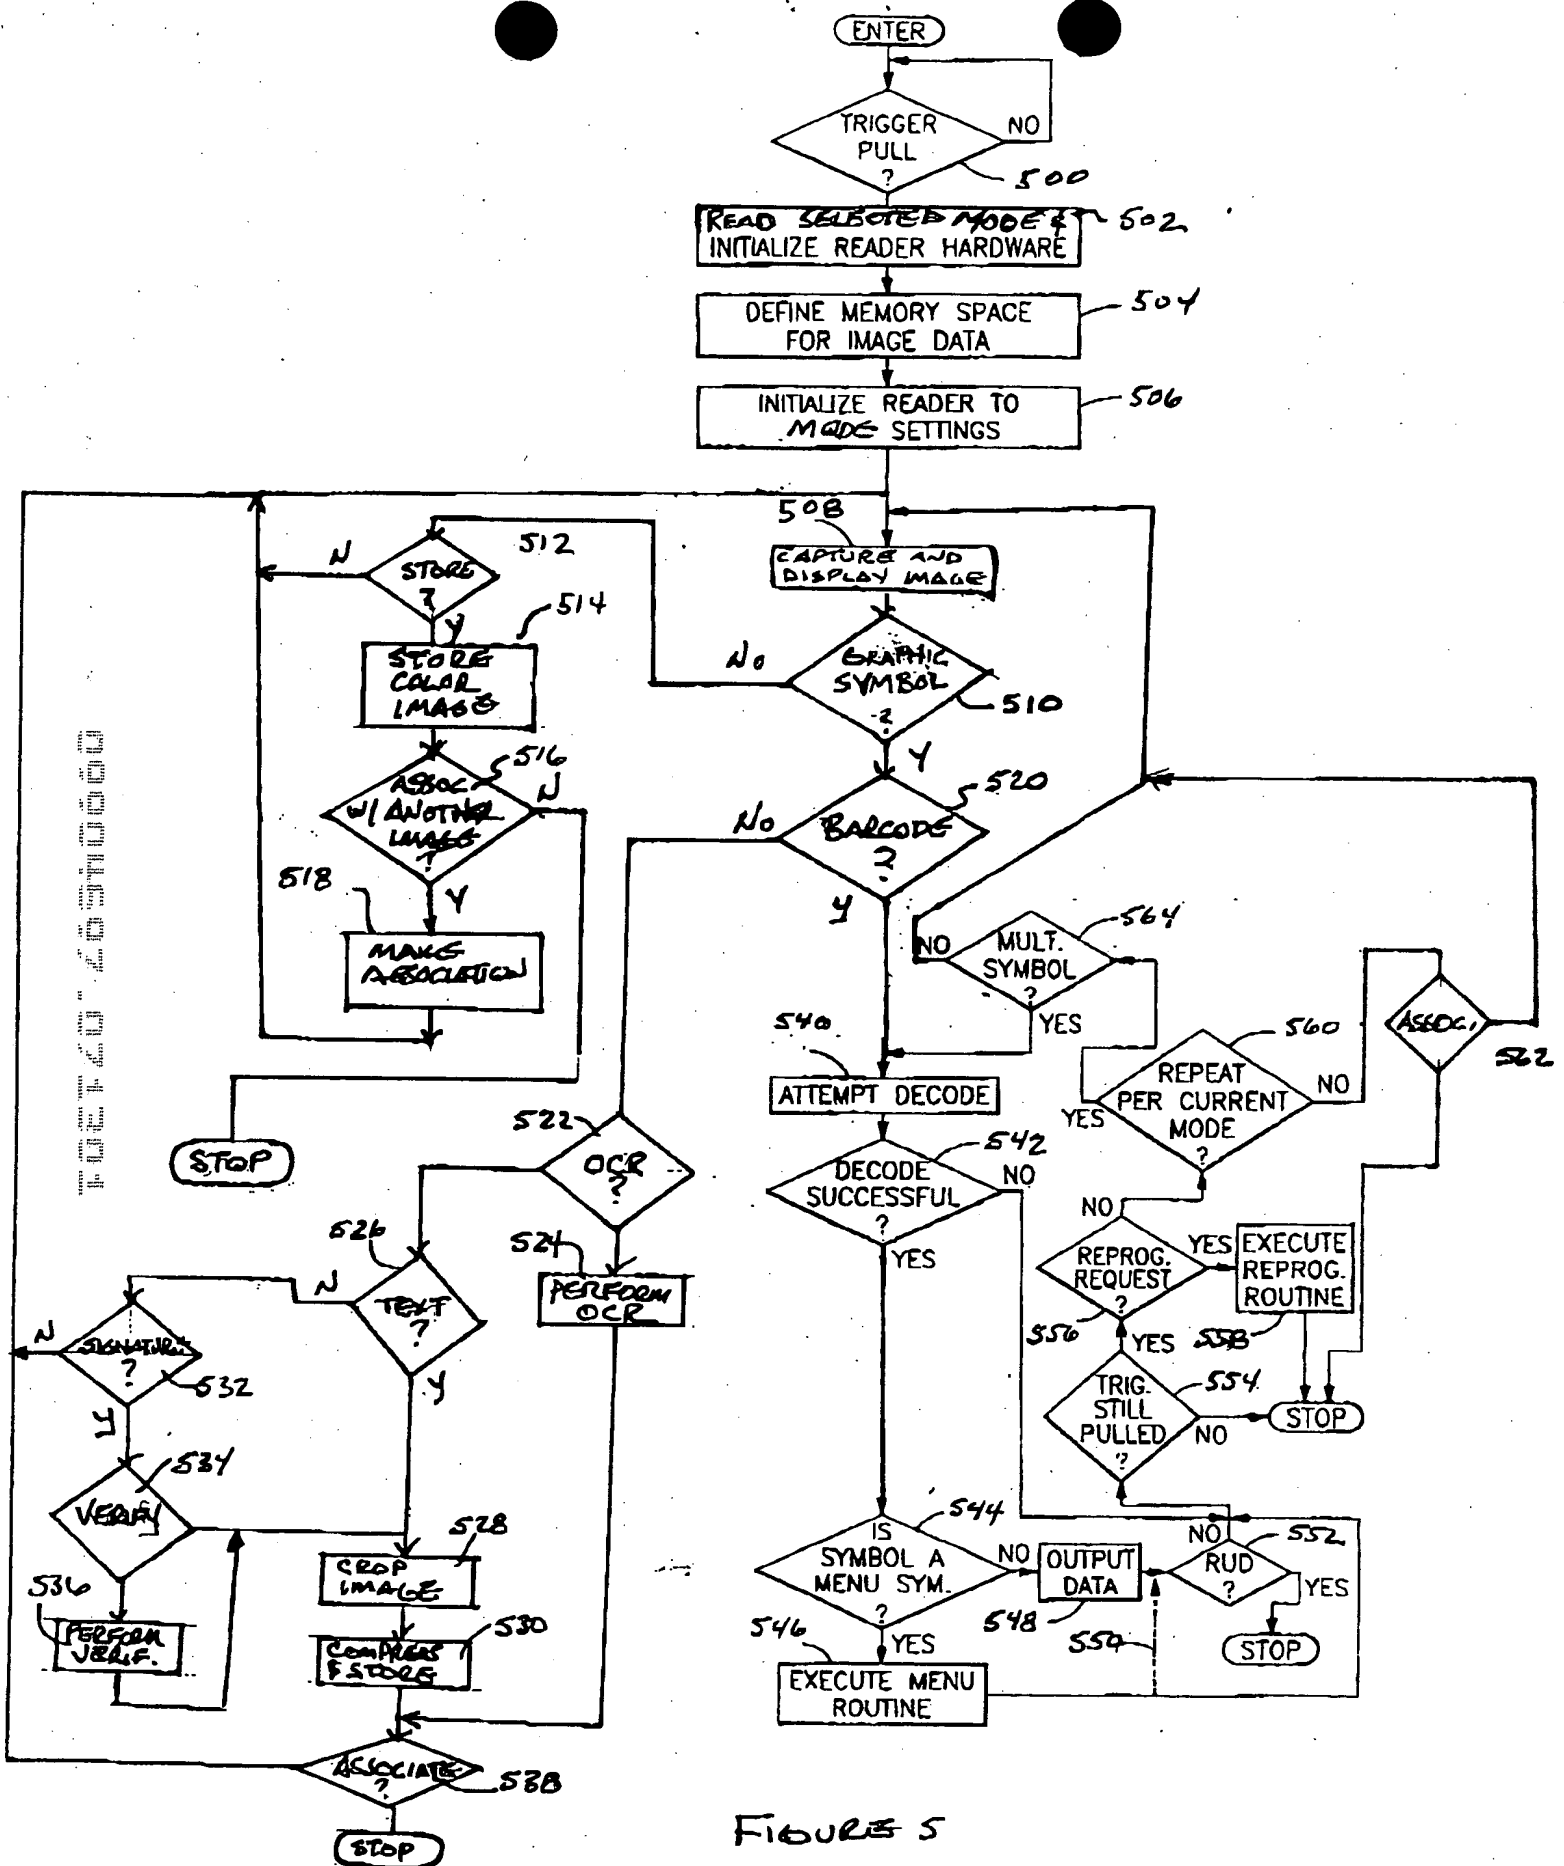


FIGURE 5

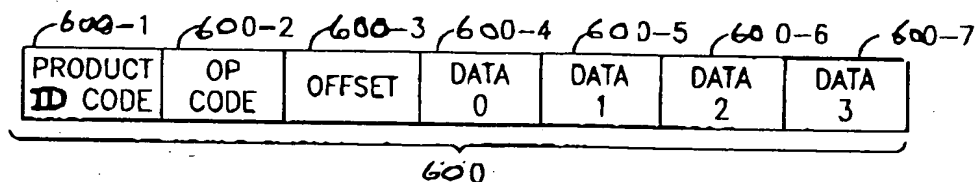


FIGURE 6A

OPTIONS (OFFSET) TABLE

- A. COMMUNICATIONS OPTIONS
 - 1. RS-232
 - 2. BAUD RATE
 - 3. RF LINK
 - 4. ETHERNET
- B. CODE OPTIONS
 - 1. DISABLE 1D
 - 2. DISABLE 2D
 - 3. DISABLE INDIV.
 - 4. MIN-MAX LENGTH
 - 5. MULTIPLE SYMBOLS ENABLED
- C. SCANNING-DECODING OPTIONS
 - 1. ONE SHOT
 - 2. REPEAT UNTIL DONE
 - 3. REPEAT UNTIL STOPPED
 - 4. SCAN ON DEMAND
 - 5. SKIP SCAN
 - 6. DECODE ON DEMAND
- D. OPERATING OPTIONS
 - 1. BEEPER VOLUME
 - 2. AIMING LED ON/OFF
 - 3. AURAL FEEDBACK
- E. TRANSMIT OPTIONS
 - 1. SEND CHECK CHAR'S
 - 2. SEND CHECKSUM
 - 3. DATA EDIT OPTIONS
- F. READER MODE OPTIONS
 - 1. Automatic
 - 2. Semi-Automatic
 - 3. Bar Code Scanning
 - 4. OCR
 - 5. Signature
 - 6. Color Imaging

OP CODE TABLE

- A. OP CODE "0" - VECTOR PROC.
 - 1. OUTPUT VERSION OF SOFTWARE
 - 2. OUTPUT CONTENTS OF PARAMETER TABLE
 - 3. DISPLAY ENABLED CODES
 - 4. PRINT PARAMETER TABLE AS BAR CODE SYMBOL
- B. OP CODE "1" - CLEAR
- C. OP CODE "2" - SET
- D. OP CODE "3" - TOGGLE
- E. OP CODE "4" - ADD
- F. OP CODE "5" - DEFAULT
- G. OP CODE "6" - LOAD
- H. OP CODE "7" - RESERVED

FIGURE 6C

FIGURE 6B

FIG. 7

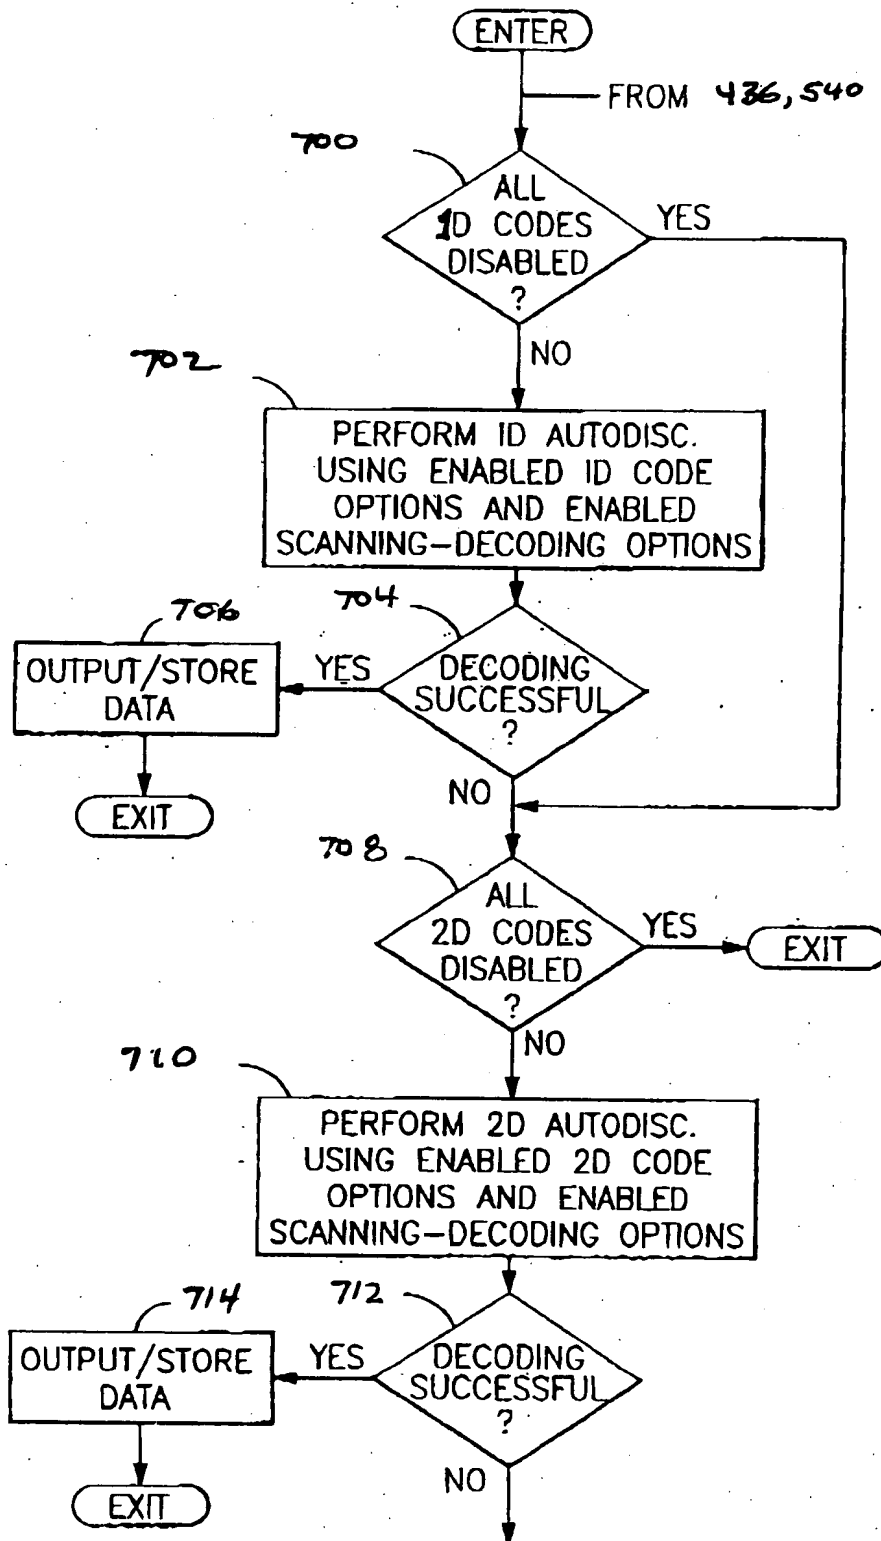


FIGURE 7

FROM 1D DECODE

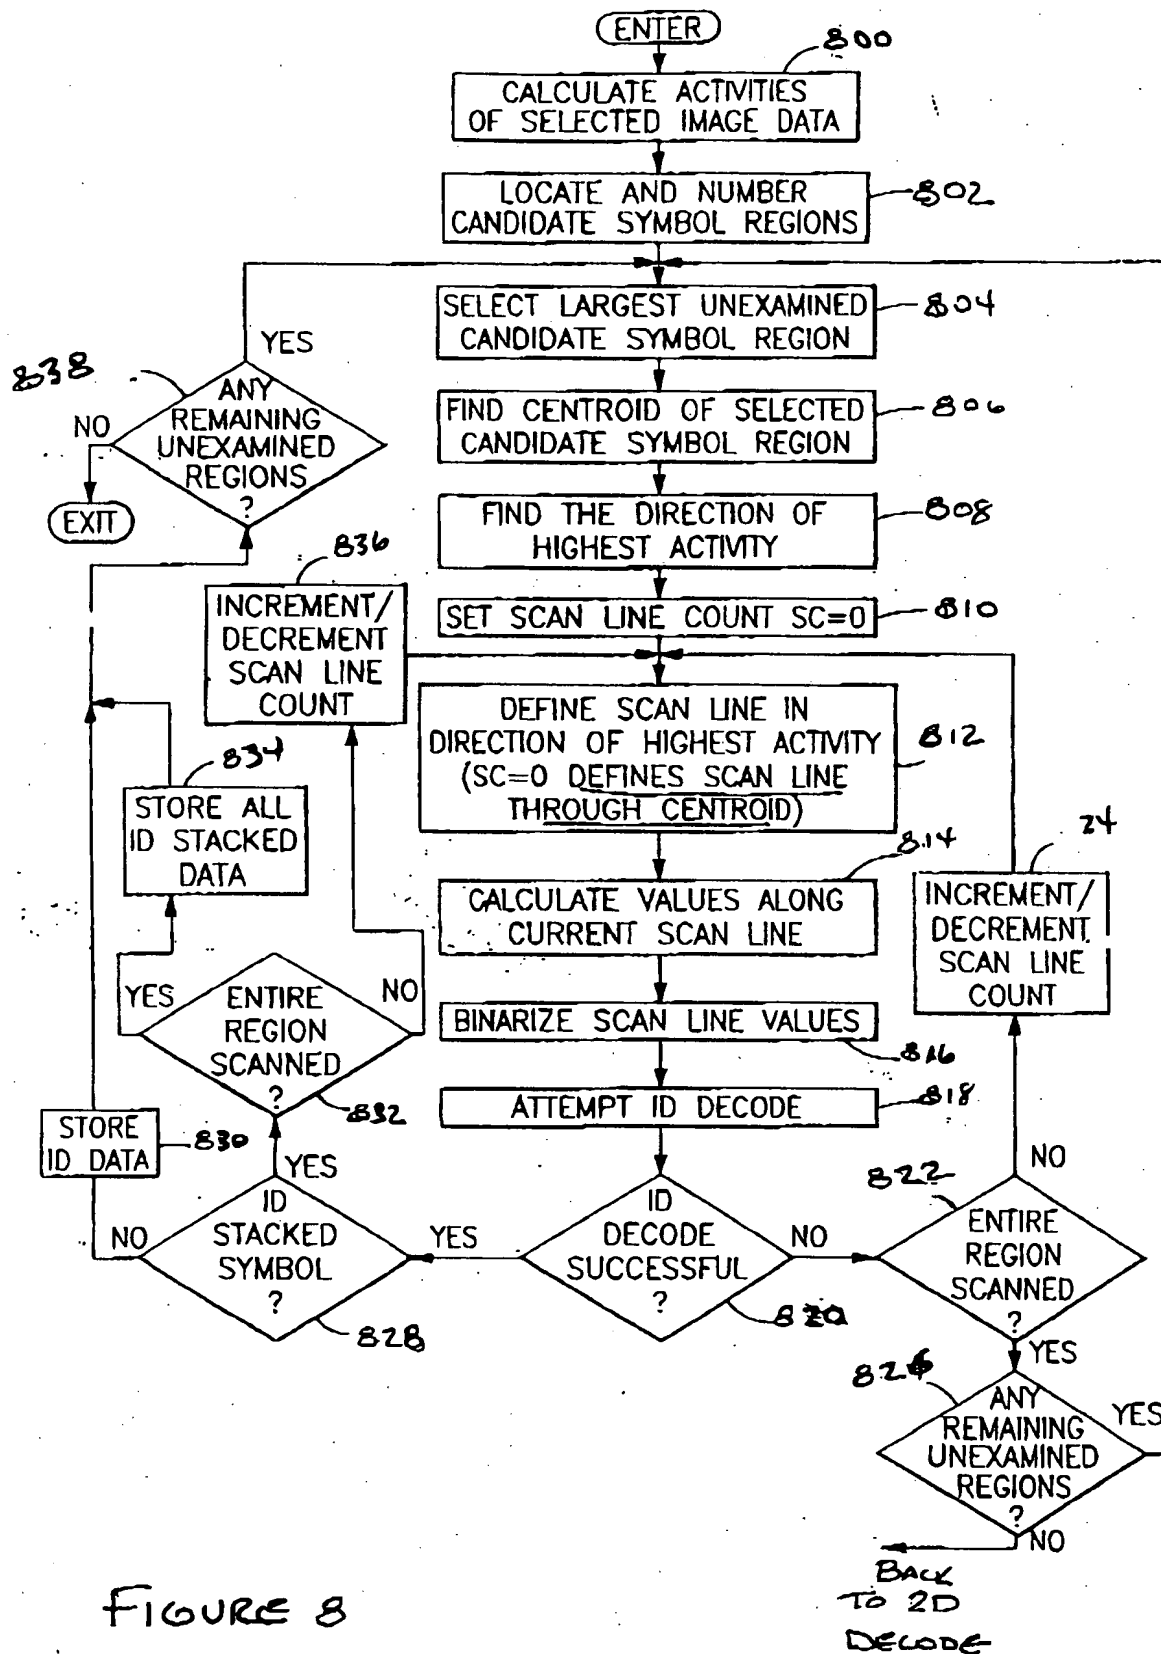


FIGURE 8

[illegible]

FIGURE 9.

1000 1002 1004 1006 1008 1010 1012 1014 1016

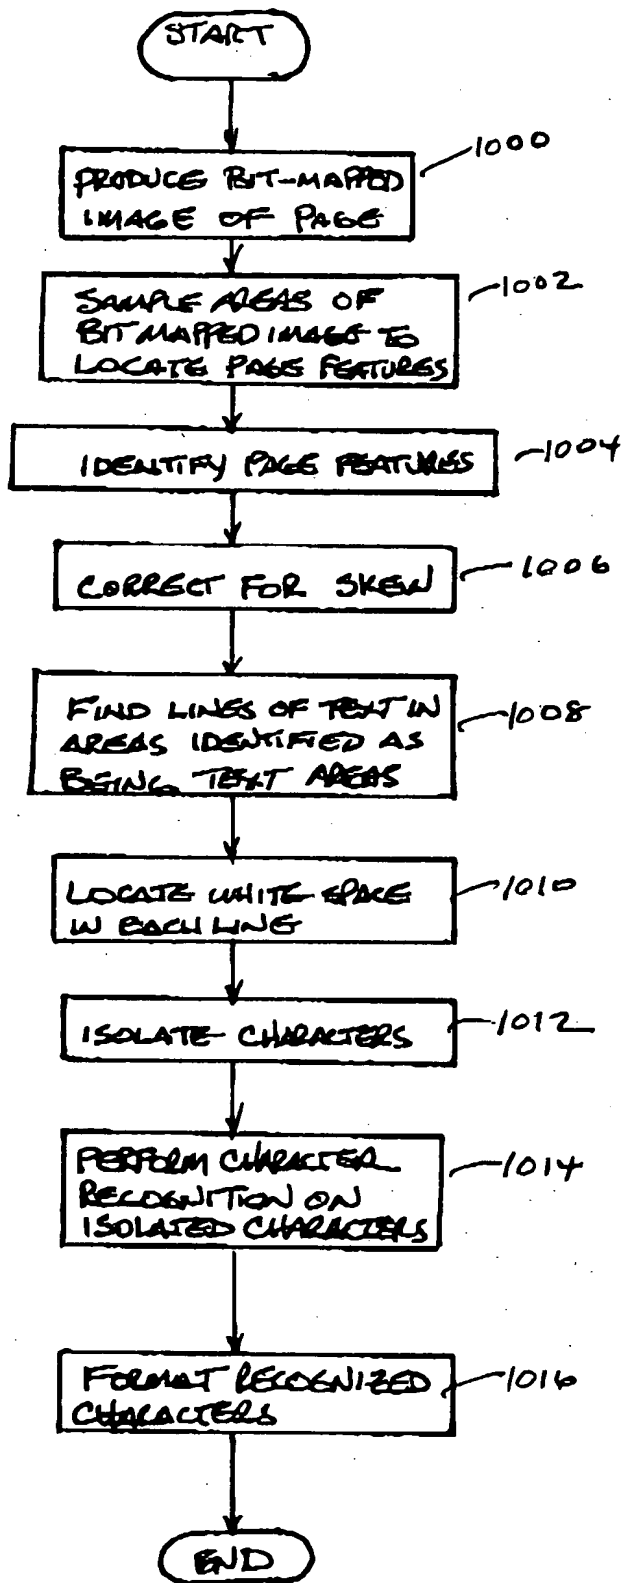


FIGURE 10

FOOTED" 20510000

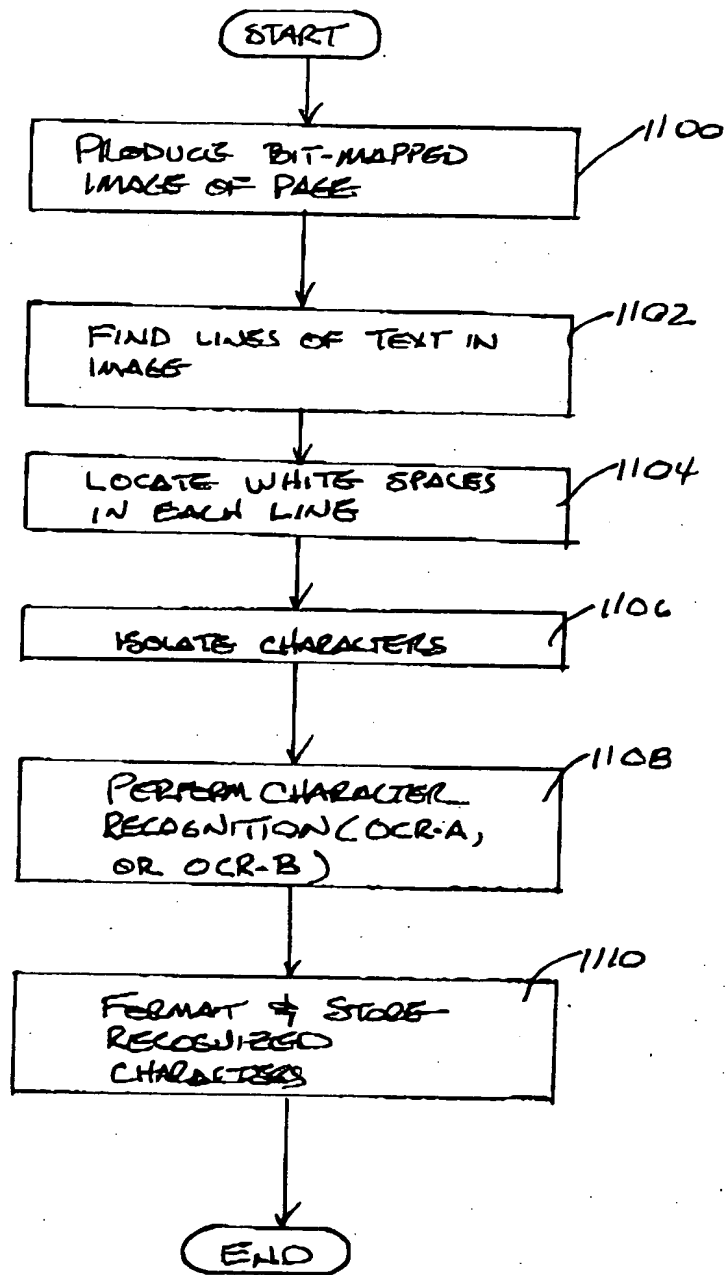


FIGURE 11

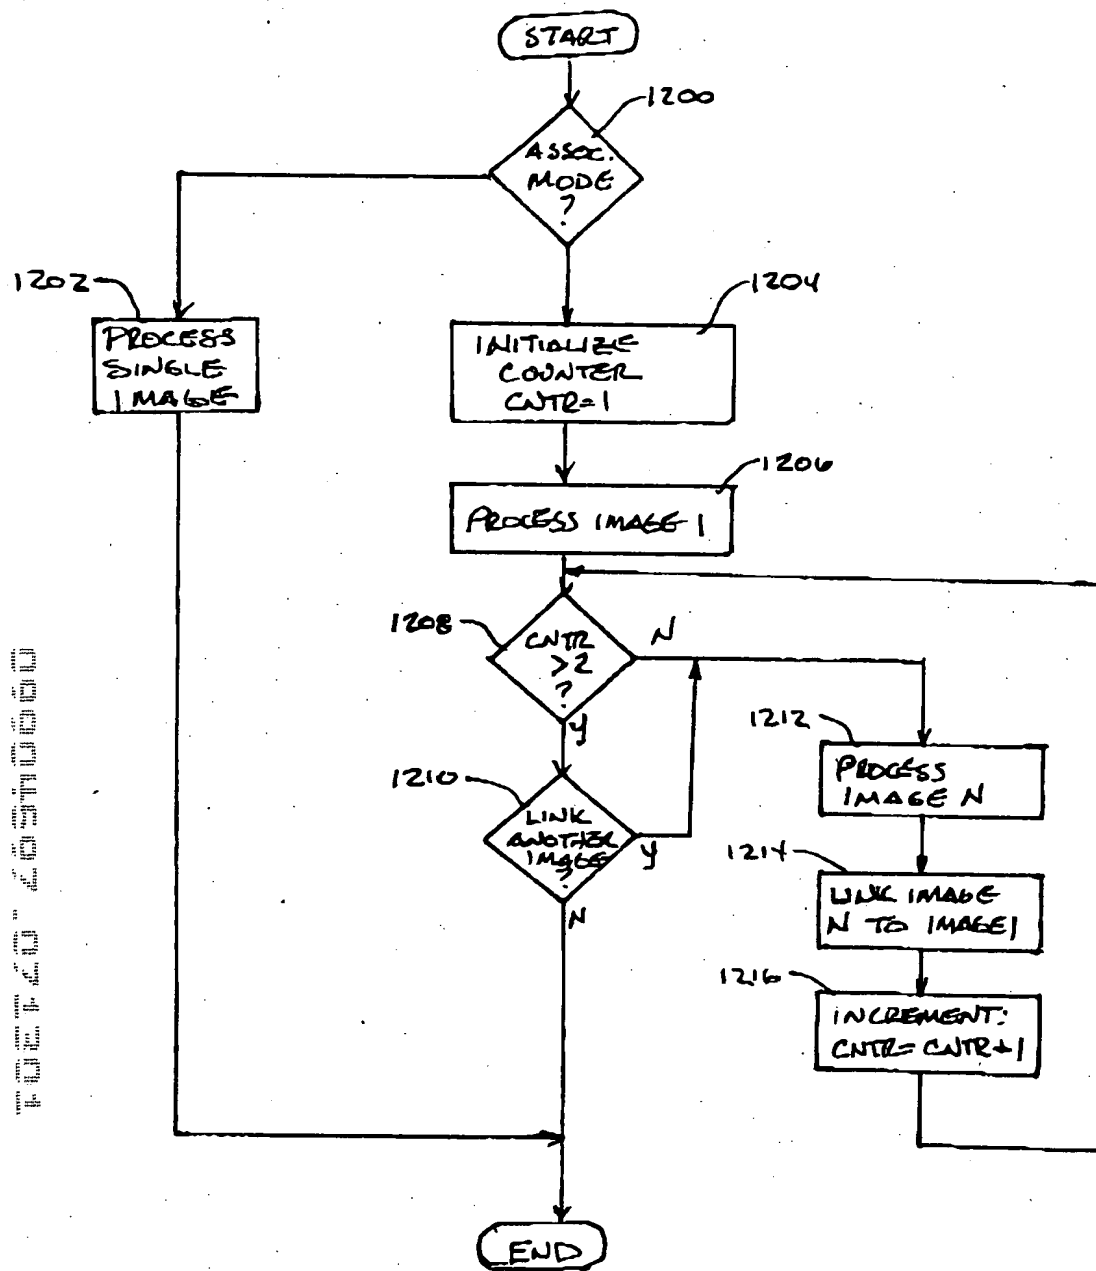


FIGURE 12

FIG. 13

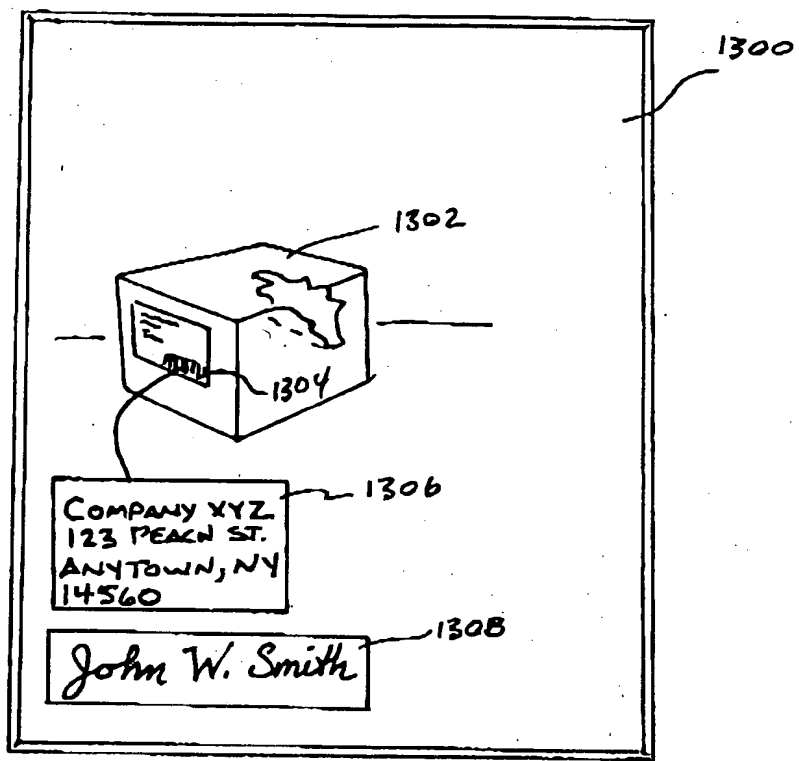


FIGURE 13

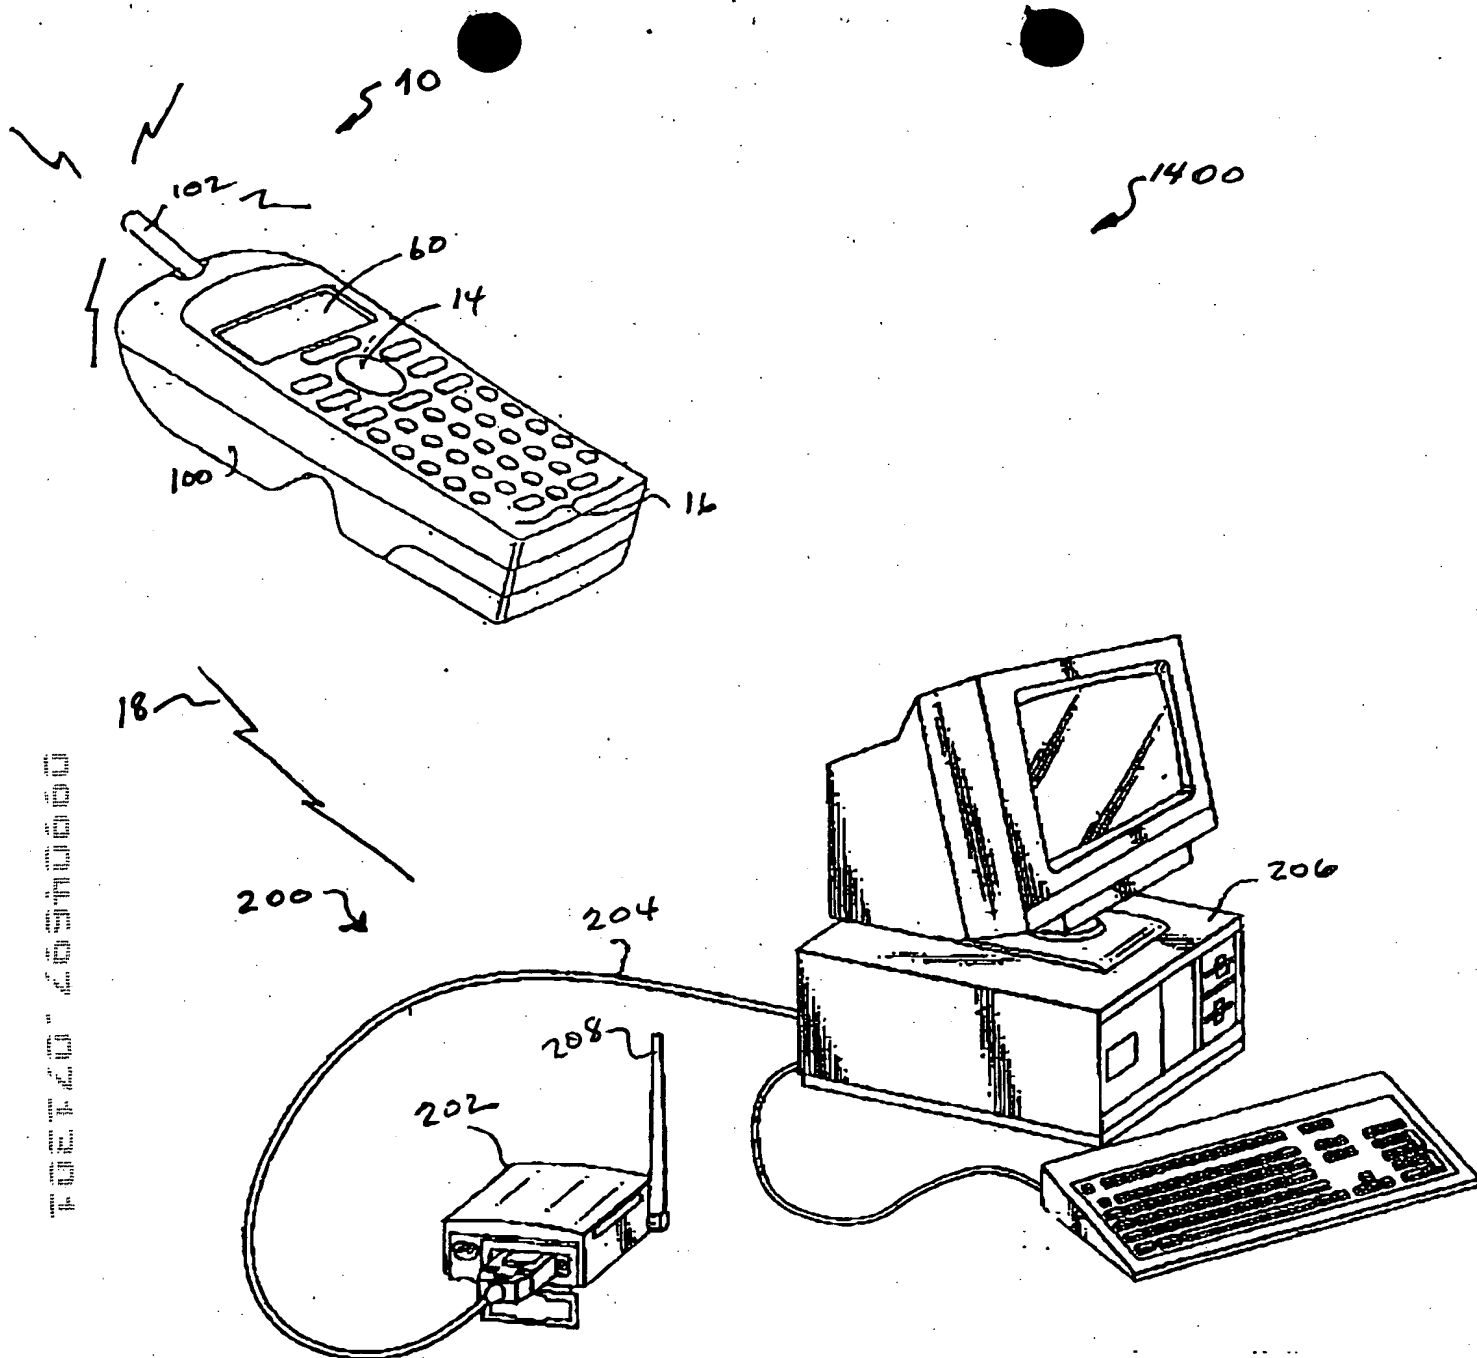


FIGURE 14

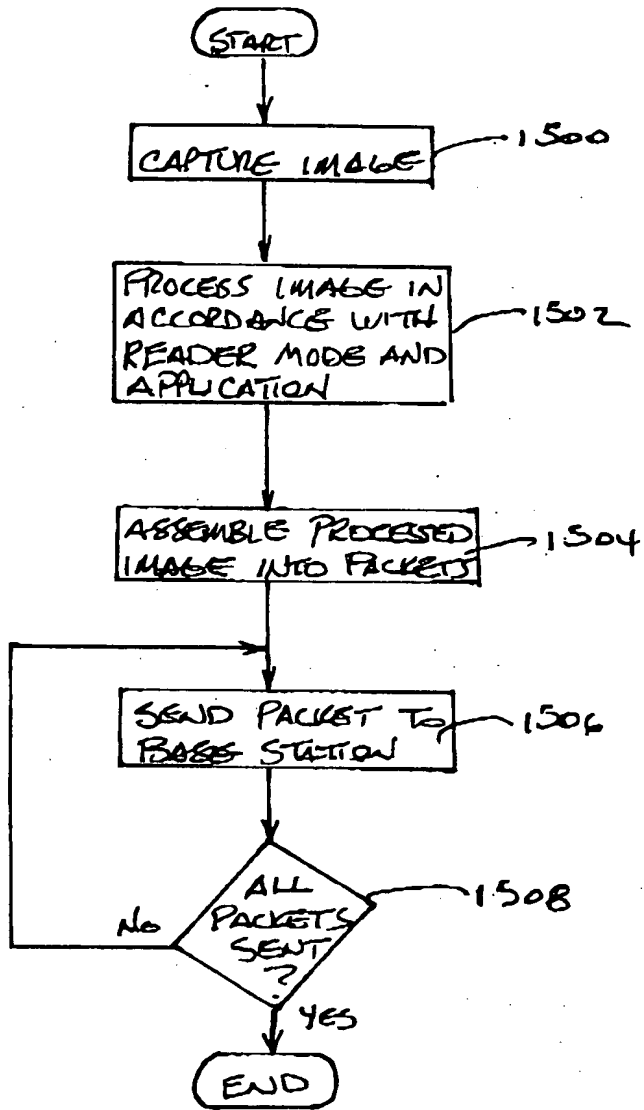


FIGURE 15

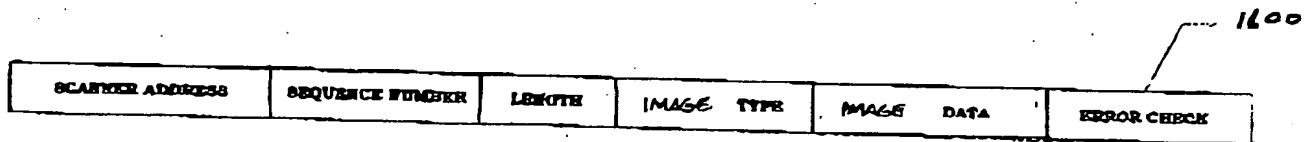


FIGURE 16A

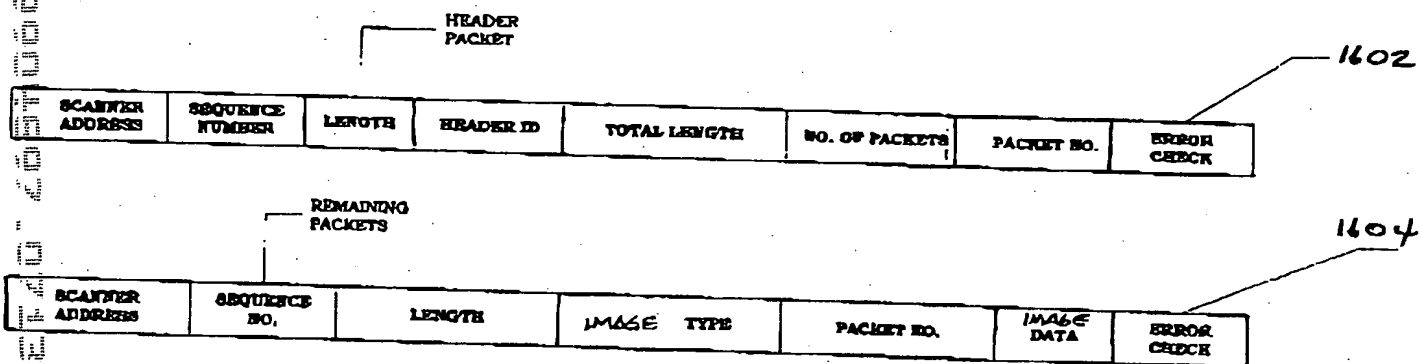


FIGURE 16B

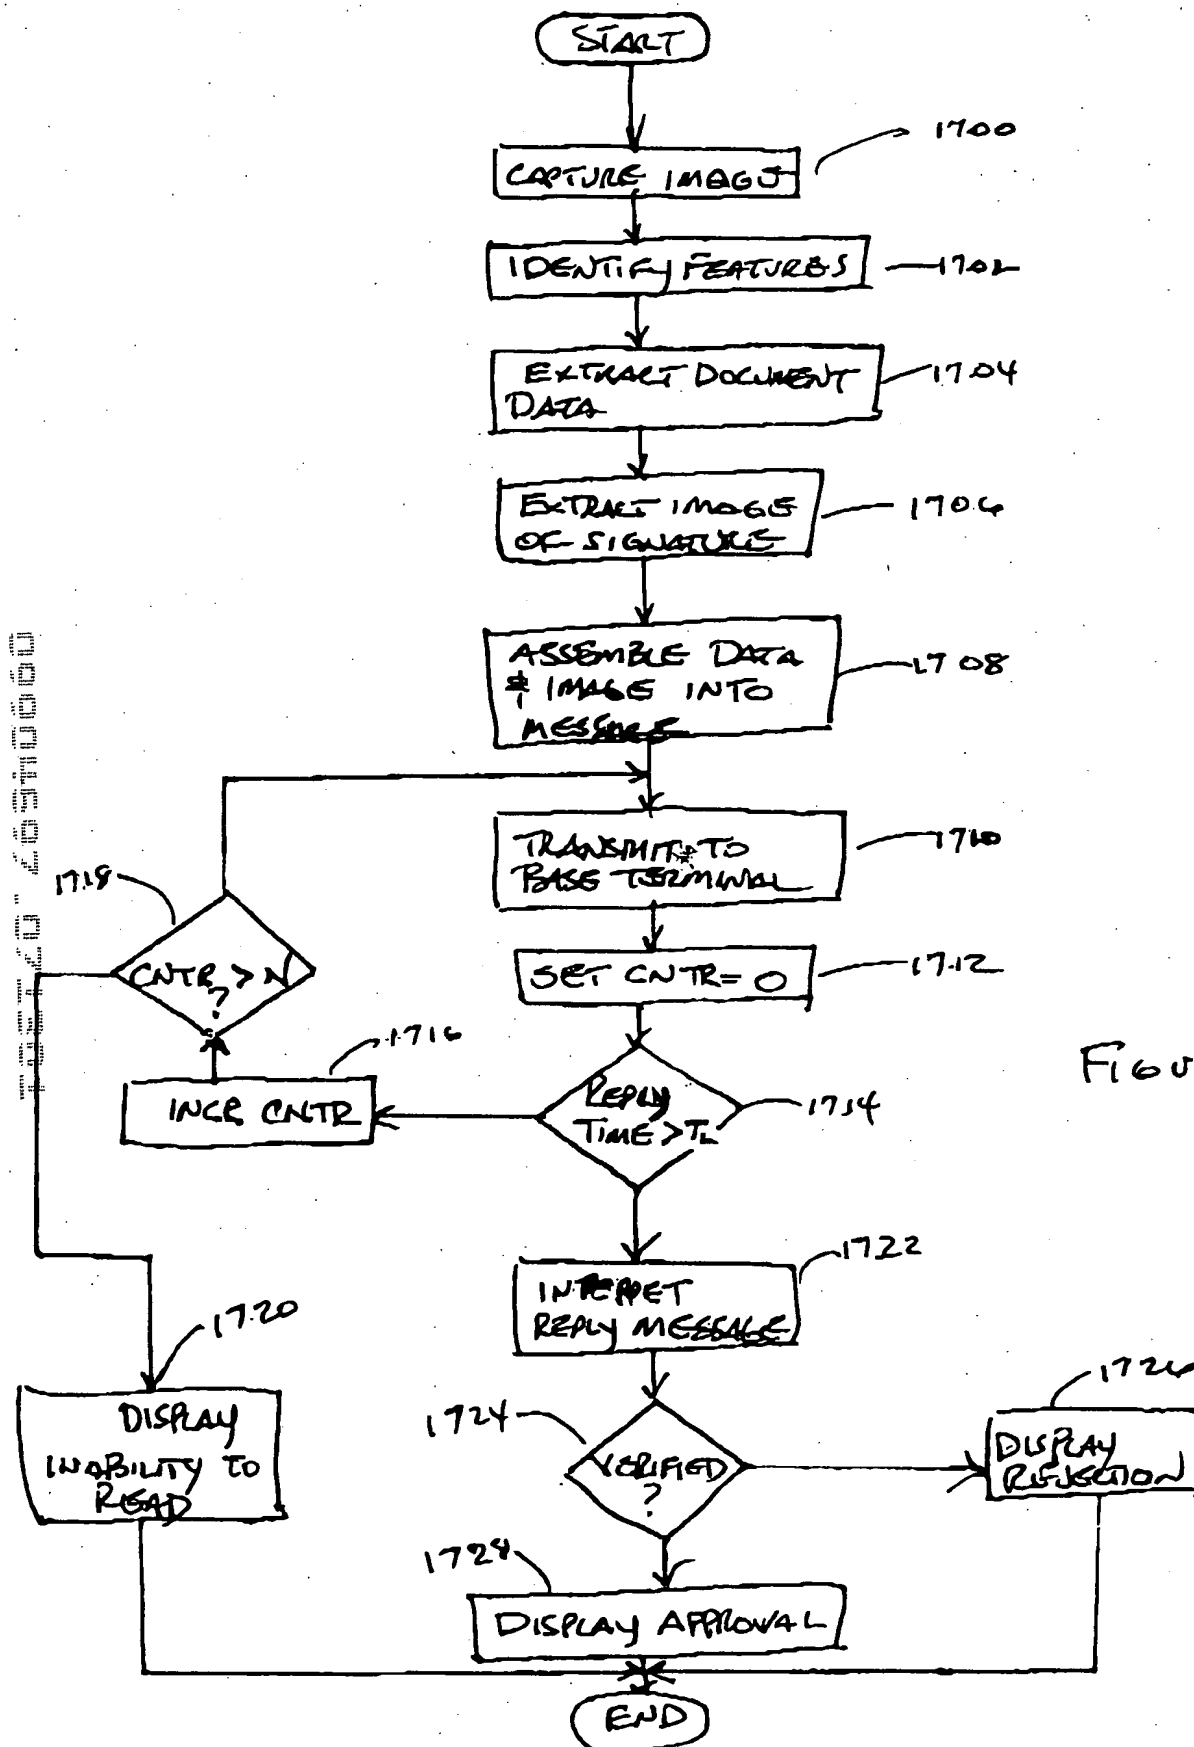


FIGURE 17

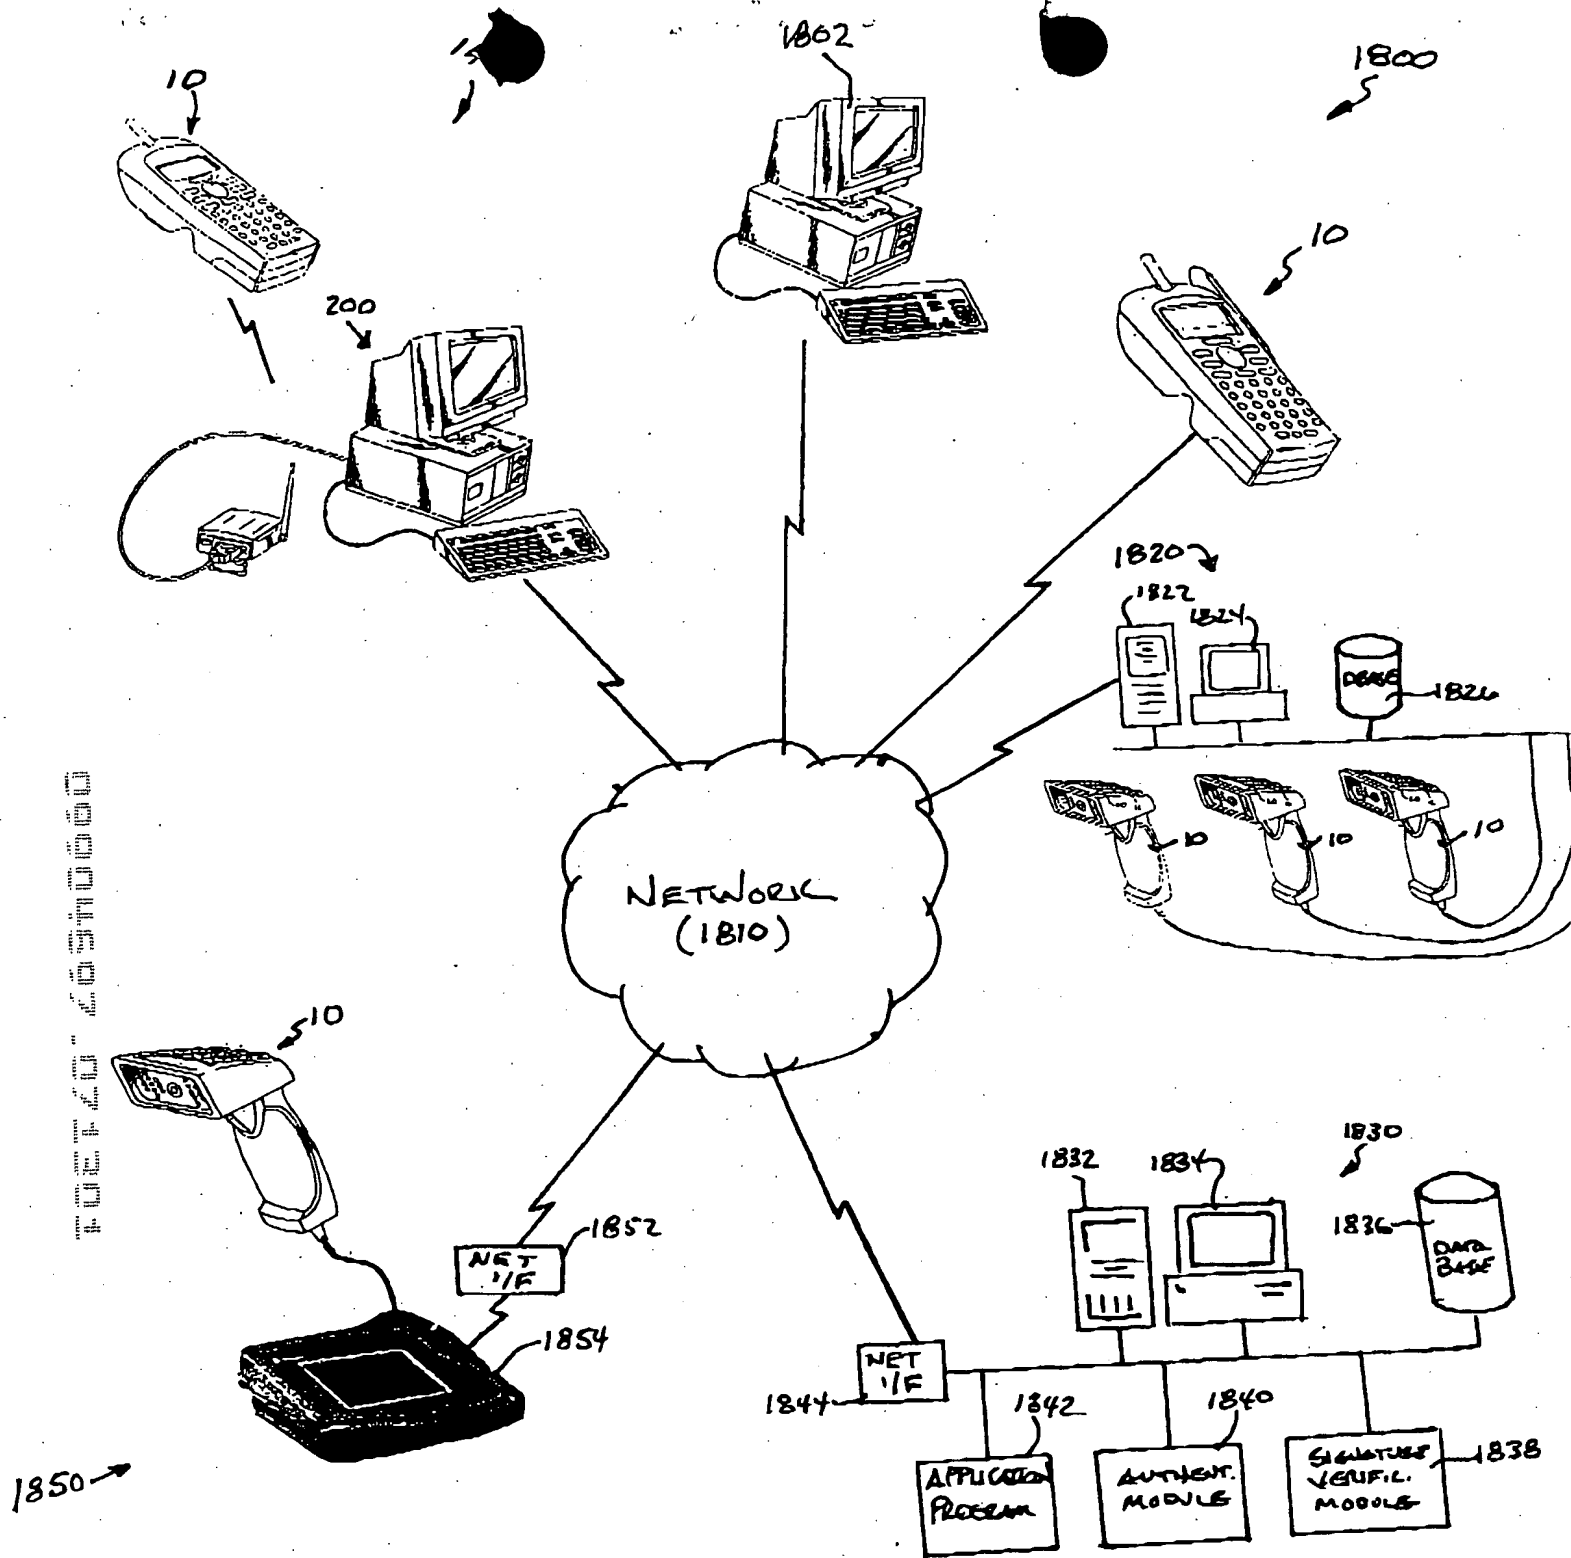


FIGURE 18